
GLOVE COMPARTMENT REMOVAL/INSTALLATION

id091700601000


1. Open the glove compartment.

2. Press both ends of the glove compartment in the directions of the arrows shown in the figure and detach the hooks.

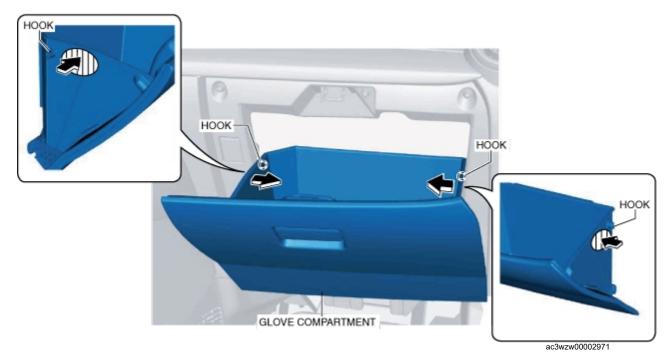


Caution

• When detaching the hooks, the hooks could interfere with the passenger-side lower panel and cause scratches or damage. When detaching the hooks, press the glove compartment ends so that the hooks do not interfere with the passenger-side lower panel.

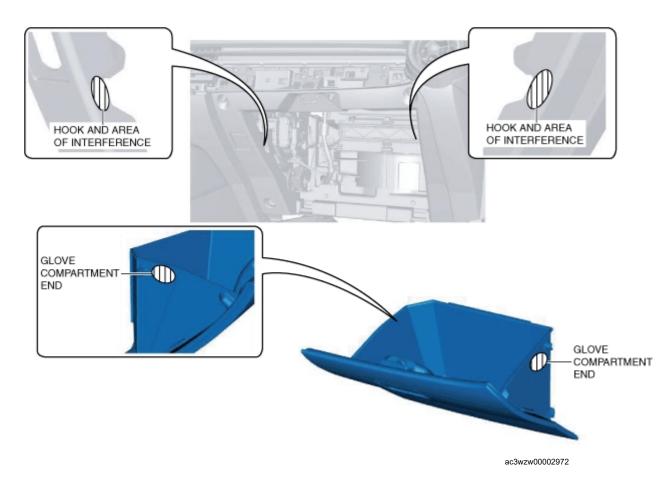

3. Lower the glove compartment in the direction of arrow (1) shown in the figure.

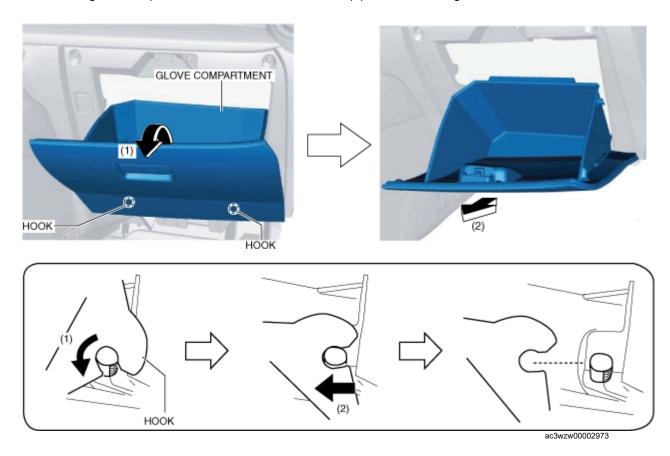

4. Move the glove compartment in the direction of arrow (2) shown in the figure and remove it while detaching the hooks.

5. Install in the reverse order of removal.